


A

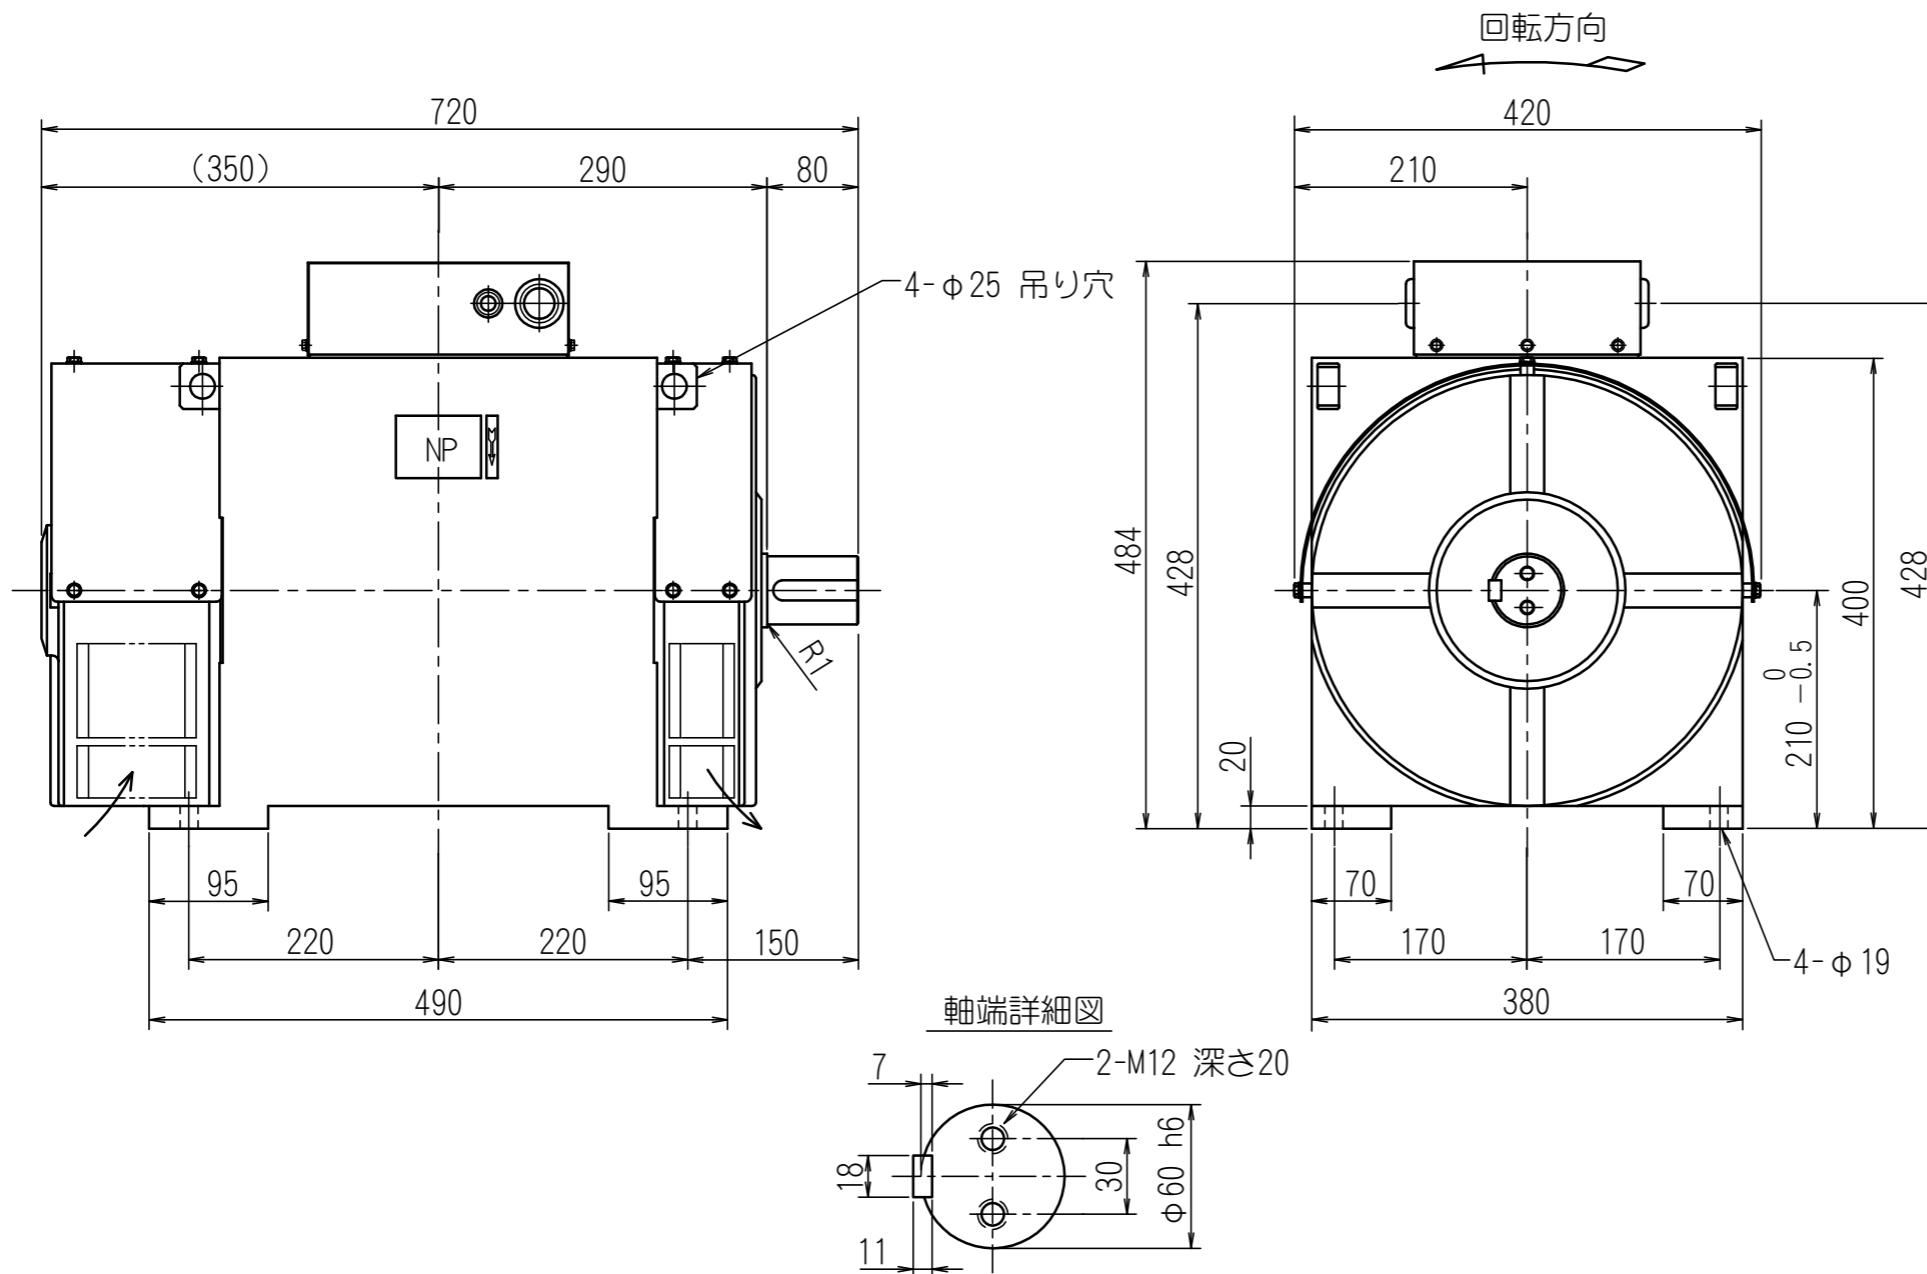

The technical drawing illustrates a control cabinet assembly consisting of two main parts: a front panel and a side panel.

Front View Dimensions:

- Total width: 209.5
- Total height: 227
- Left vertical distance from bottom to top edge of internal components: 160
- Right vertical distance from bottom to top edge of internal components: 200
- Left vertical distance from bottom to top edge of mounting holes: 45
- Right vertical distance from bottom to top edge of mounting holes: 45
- Left vertical distance from bottom to top edge of side panels: 25
- Right vertical distance from bottom to top edge of side panels: 26
- Bottom horizontal distance between side panels: 230

Side View Dimensions:

- Total height: 80
- Total width: 35
- Total depth: 81
- Right vertical distance from bottom to top edge of side panels: 36

A : グロメット 内径Φ27
B : グロメット 内径Φ17

端子台配列

容量	相数	極数	回転速度	電圧	電流	周波数	時間定格	励磁方式	絶縁種別	質量(約)
20kVA	3Φ/3W	4P	1500min ⁻¹	200V	57.8A	50Hz	連続	ブラシレス	B	280kg

寸法許容差(図中記載を除く)		
JIS B0405	極粗級相当	
3 を超え	6 以下	±0.5
6 を超え	30 以下	±1
30 を超え	120 以下	±1.5
120 を超え	400 以下	±2.5
400 を超え	1000 以下	±4
1000 を超え	2000 以下	±6
2000 を超え	4000 以下	±8

枠番号	規 格	保護方式	冷却方式
4F-20CV	JEC-2130	IP-22	JCO

軸受	軸端側	6313LLU
	励磁機側	6208LLU

Designed by 向川	Checked by 向川	Approved by 荒木	Date OCT. 4. 2006	Title Name 外形図
-------------------	------------------	-------------------	----------------------	-------------------

THIRD ANGLE PROJECTION
UNIT ~ mm

G.CO., LTD.

Sheet
1 /